


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020/5/18	ZHANG	JIN

- Material  
 ○Housing : PA66, UL94V-0  
 ○Pin header : Copper alloy, Tin plated
- Electrical  
 Rated voltage : 300V  
 Rated current : 16A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC1500V/1min
- Mechanical  
 Operating temperature:-40℃~+105℃  
 Soldering temperature:250℃±5/5sec
- RoHS compliance

HOW TO ORDER  
 HT396V-3.96-XXP-1 X-XXXXX

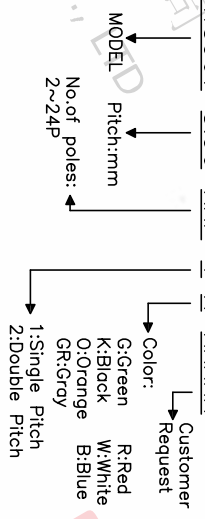

Pitch range	Nominal dimension	range	Projection
>0	>6	>10	0.1/10
~	~	~	~
6	10	24	~
±2'	±0.15	±0.20	±0.30
±2'	±0.30	±0.50	±0.70
±2'	±1.00	±1.30	±1.50

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1

DRAWING NO.	W10000022
-------------	-----------

TITLE	HT396V-3.96-XXP-1X
PROJECTION	UNIT
mm	A4
SHEET SIZE	A4
SERIES	HT396V

**DFE**  
 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD