
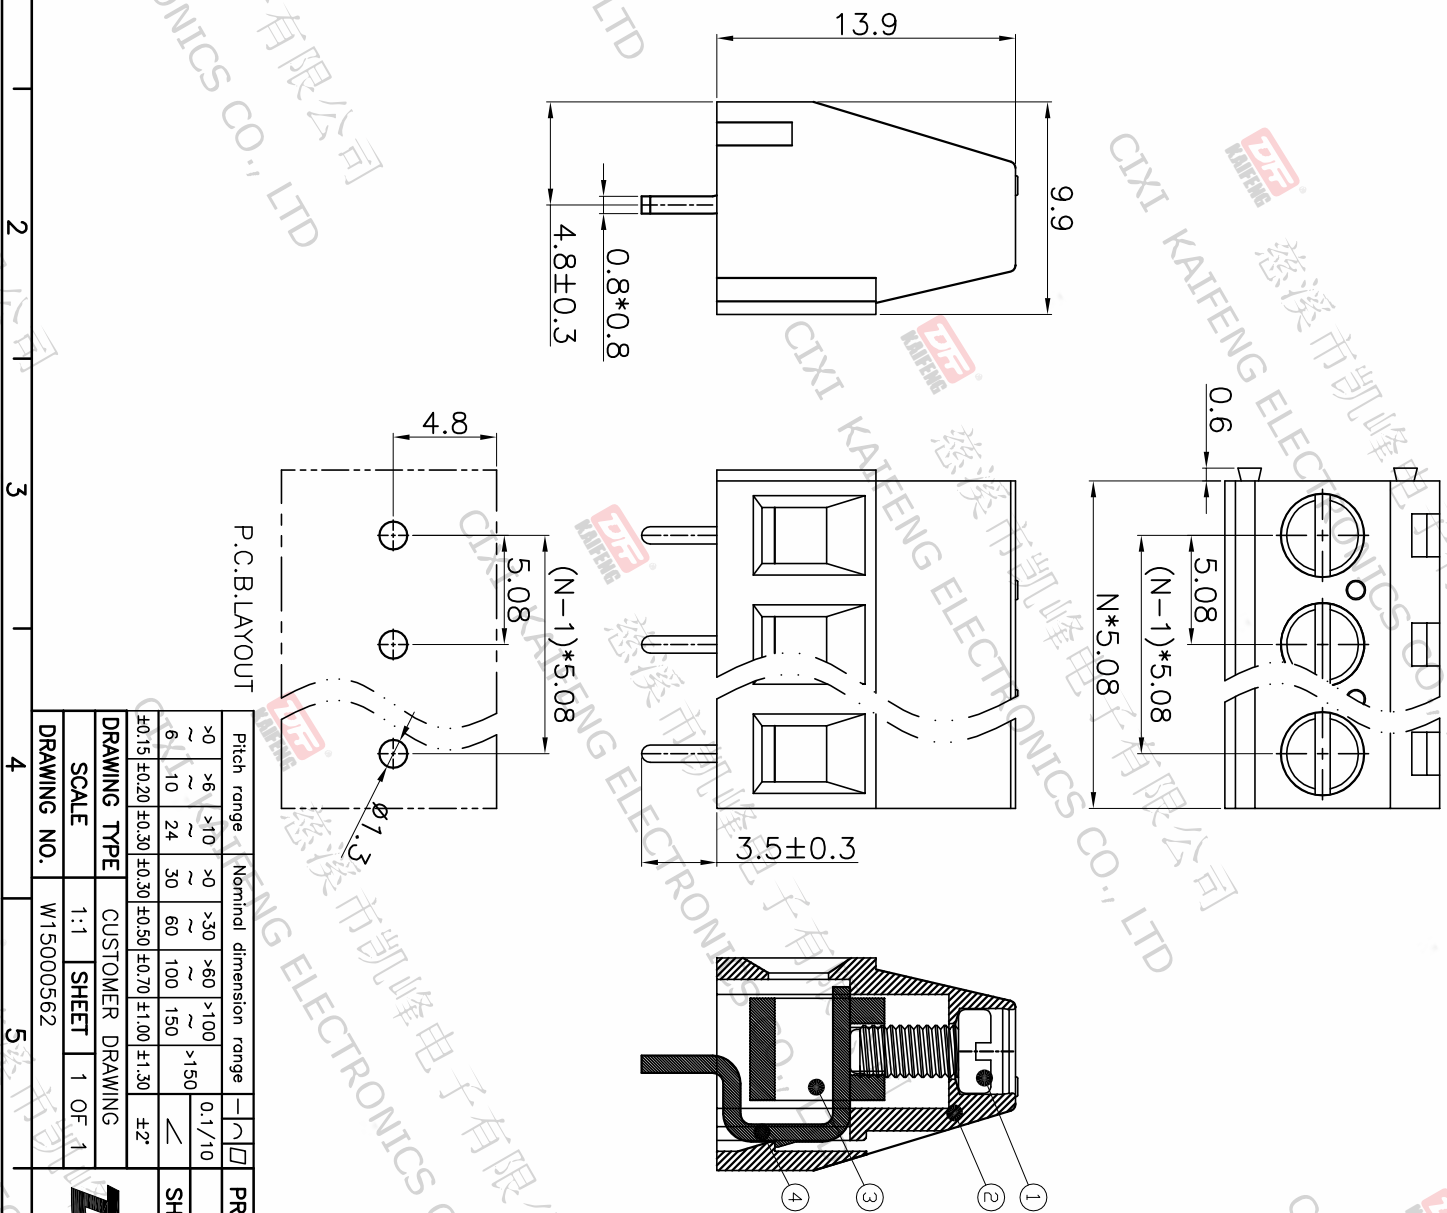


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.19	DENG	JIN

- Material  
 @Screws : M2.5 steel, Zinc plated,  
 •-• slot type  
 @Housing : PA66, UL94V-0  
 @Clamp : Copper alloy, Ni plated  
 @Pin header : Copper alloy, Tin plated
- Electrical  
 UL IEC  
 Rated voltage : 300V 250V  
 Rated current : 10A 18A  
 Contact Resistance: 20mΩ  
 Insulation resistance: 500MΩ/1000V  
 Withstanding Voltage : AC2000V/1min  
 Wire range: 24-12AWG 2.5mm<sup>2</sup>

- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec  
 Torque: 0.4N.m (3.54lbf.in)  
 Strip length: 6-7mm
- RoHS compliance

HOW TO ORDER  
 KF128V-5.08-XXP-1 X-XXXXX

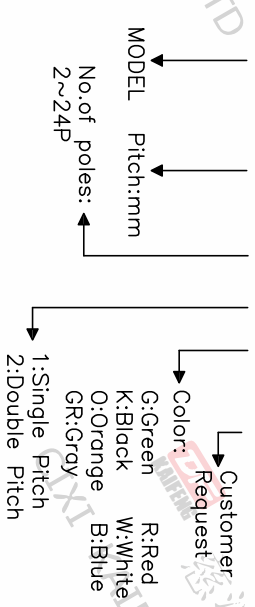

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>0	0.1/10	mm
~6	~30		
~10	~60		
~24	~100		
~30	~150		
±0.15	±0.30		
±0.20	±0.50		
±0.30	±0.70		
	±1.00		
	±1.30		
	±2		

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W15000562		
PROJECT TITLE		KF128V-5.08-XXP-1X	
SHEET SIZE		A4	
SERIES		KF128	

**DFE** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD