

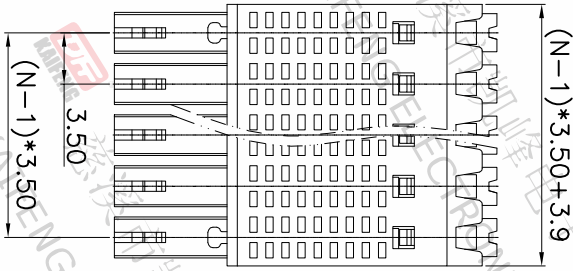
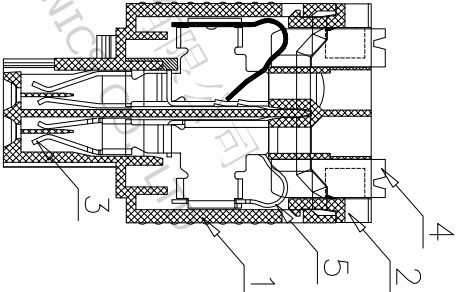
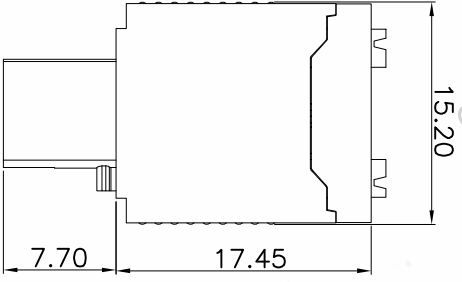


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.19	ZHANG	JIN




- Material
 - ⊙Housing : PA66, UL94V-0
 - ⊙Cover : PA66, UL94V-0
 - ⊙Contact : Copper alloy
 - ⊙Button : PA66, UL94V-0
 - ⊙Reed : Stainless steel

- Electrical

UL	IEC
Rated voltage : 300V	320V
Rated current : 10A	13.4A
Contact resistance : 20mΩ(Max)	
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC1600V/1min	
Wire range: 28-16AWG 0.2-1.5mm ²	

- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ± 5 / 5sec
 - Strip length: 10-11mm
- RoHS compliance

HOW TO ORDER
 KF12EDH-3.5-2*XXP-1 X-XXXXX

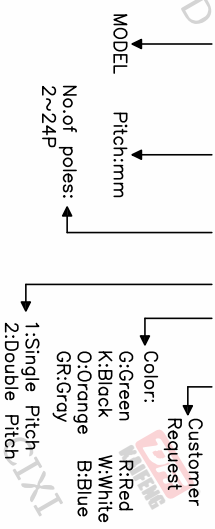

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~6	>30	mm
~10	>60	A4
~24	>100	
~30	>150	
±0.15	±0.30	
±0.20	±0.50	
±0.30	±0.70	
±1.00	±1.30	
	±2°	

DRAWING TYPE	SCALE	SHEET	1 OF 1
CUSTOMER DRAWING	1:1	SHEET	1 OF 1
DRAWING NO.	W10001952		

PROJECTION	TITLE
mm	KF12EDH-3.5-2*XXP-1X
A4	SERIES KF12EDH

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD