

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN





- Material  
 ØHousing : PA66, UL94V-0  
 ØPin header : Copper alloy, Tin plated  
 ØNut : M2.5, Copper alloy

- Electrical  
 UL IEC  
 Rated voltage : 300V 320V  
 Rated current : 8A 7A  
 Contact resistance : 20mΩ(Max)  
 Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC2000V/1min

- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5/5sec

• RoHS compliance

HOW TO ORDER  
 KF2EDGVM-Y-5.0-XXP-1 X-XXXXX

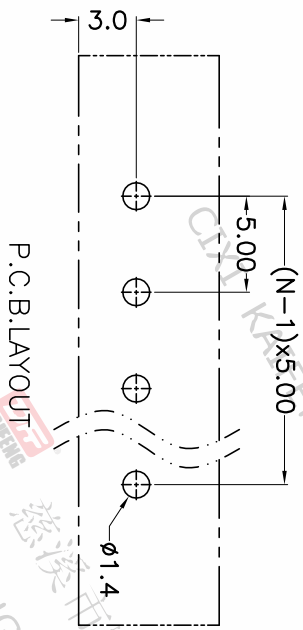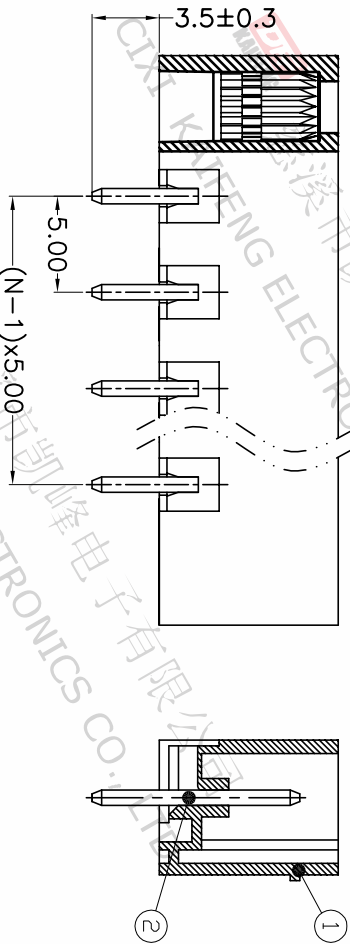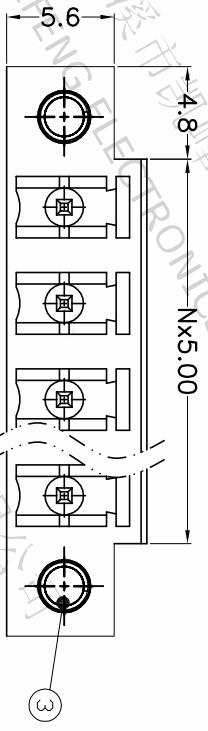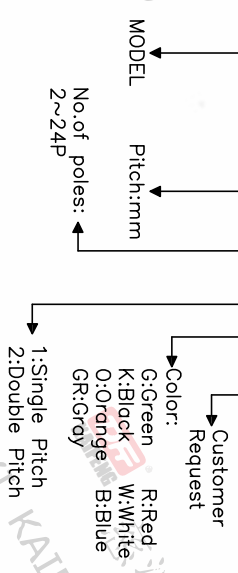

Pitch range	Nominal dimension range	Projection
>0	>30	0.1/10
~6	~60	≤
~10	~100	
~24	~150	
±0.15	±0.30	±2°
±0.20	±0.30	
±0.30	±0.50	
±0.70	±1.00	
±1.30	±1.30	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10000772

**DF** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD

TITLE: KF2EDGVM-Y-5.0-XXP-1X  
 UNIT: mm  
 SHEET SIZE: A4  
 SERIES: KF2EDGVM-Y