

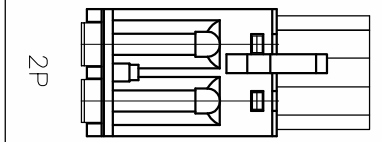





REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.19	ZHANG	JIN



2P

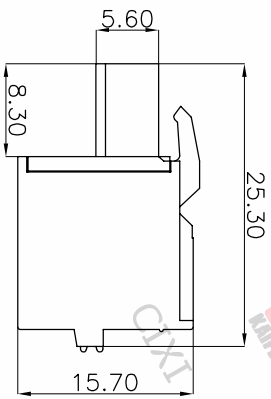

- Material
 - ⊙Button : PA66, UL94V-0
 - ⊙Housing : PA66, UL94V-0
 - ⊙Reed : Stainless steel
 - ⊙Contact : Copper alloy, Tin plated
 - ⊙Cover : PA66, UL94V-0


- Electrical

UL	IEC
Rated voltage : 300V	320V
Rated current : 10A	20A
Contact resistance : 20mΩ(Max)	
Insulation resistance: 500MΩ/DC500V	
Withstanding Voltage : AC2000V/1min	
Wire range: 26-12AWG	2.5mm ²

- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ±5 / 5sec
 - Strip length: 10-11mm

- RoHS compliance

HOW TO ORDER
KF2EKDF-5.08-XXP-1 X-XXXXX

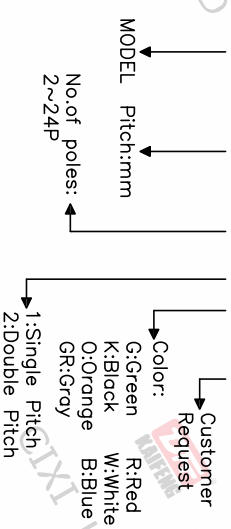

Pitch range	Nominal dimension range	Projection
>0	>30	0.1/10
~6	~60	~
~10	~100	~
~24	~150	~
±0.15	±0.30	±2°
	±0.50	
	±0.70	
	±1.00	
	±1.30	

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10002012

PROJECTION	TITLE
UNIT	KF2EKDF-5.08-XXP-1X
mm	
SHEET SIZE	A4
SERIES	KF2EKDF

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD