
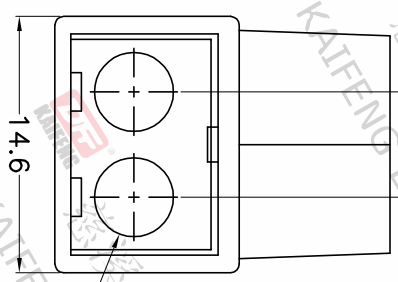
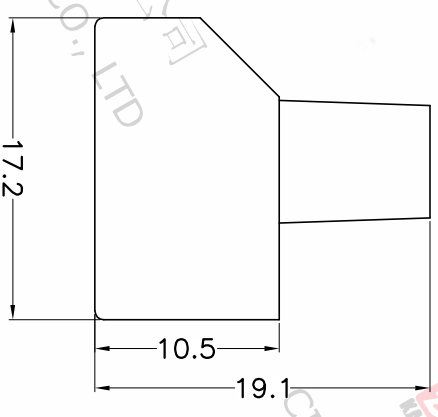


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.10/31	DENG	JIN

- Material
 ØScrews : M4.0 steel, Zinc plated,
 — slot type
 ØHousing : PC
 ØClamp : Copper alloy, Ni plated


- Electrical
 Rated voltage : 400V
 Rated current : 20A

- Mechanical
 Operating temperature: -40°C~+125°C
 Torque: 0.8N.m (Max1.2N.m)
 Strip length: 7-8mm

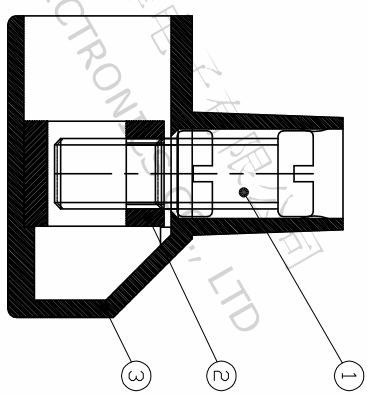

HOW TO ORDER

RU10-T85-6.0-XXP-1 X-XXXXX

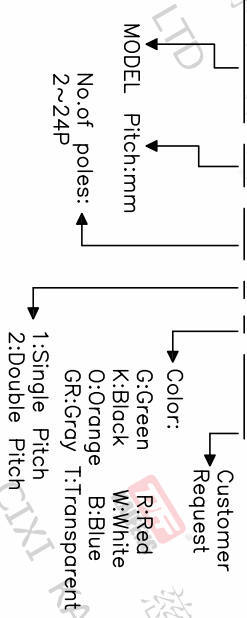

Pitch range	Nominal dimension range	Projection
>0	>0	0.1/10
~6	>30	∠
~10	>60	
~24	>100	
~30	>150	
±0.15 ±0.20 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±2*	

DRAWING TYPE	CUSTOMER DRAWING	PROJECTION	TITLE
SCALE	1:1	UNIT	RU10-T85-6.0-2P-1T
DRAWING NO.	W15000952	SHEET	SHEET SIZE
		1 OF 1	A4
			SERIES
			RU10-185

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

